

GENERIC TRAU FRAME STRUCTUREField of the Invention

The invention relates to communication systems, and particularly to a  
5 transcoder/rate adaptor unit frame in the radio access network of a mobile  
communication system.

Background to the Invention

In the global system for mobile communications (GSM) a transcoder rate  
10 adaptor unit (TRAU) is provided in the radio access network. The TRAU enables the  
use of different transmission rates over the Abis interface between a base station  
controller (BSC) and one or more base transceiver stations (BTSs). The switching  
sub-system to which the radio access network provides an interface for mobile  
stations operates at a bit rate of 64 kbps, which is the rate for which the mobile  
15 services switching centre (MSC) of the switching sub-system is designed.

It is well-known in GSM systems for adaptive multi-rate (AMR) to be  
supported, which enables the rate between the BSC and a BTS to be varied between  
one of eight different rates. Eight codecs are provided in the BSC, and an  
appropriate codec is chosen to ensure the required rate is used. For example, a  
20 reduced rate may be used where the quality of the air interface is known to be poor.

The codecs for selecting different rates are provided in the TRAU. The TRAU  
is logically associated with the BSC. In accordance with the particular codec  
selected for transmission on the Abis interface, a particular TRAU frame format is  
provided on the Abis interface. This frame is specific to the specific codec used. For  
25 example for AMR coding, the data rate in the TRAU frame is different for each codec,  
and the data bits are located in different positions for each TRAU frame. In the AMR  
example, where eight different codecs are provided, eight different TRAU frame  
formats are specified.

The third generation partnership project (3GPP) is proposing to introduce a  
30 flexible layer one (FLO) concept to support the handling of current and future  
services in the GERAN (GSM/EDGE radio access network). As part of current

BEST AVAILABLE COPY

standardisation work in 3GPP, FLO is being introduced to the circuit switched part of the GERAN system.

The advent of flexible layer one in 3GPP systems provides the possibility for more flexibility in encoding techniques used in the radio access network. Potentially, therefore, in the future there may be provided many different types of codecs in the TRAU. Consequently, this will require many different types of TRAU frame formats. The advent of FLO may disadvantageously lead to the need to specify a number of different TRAU frame formats, by way of standardisation or otherwise.

It is an aim of the invention to address the above-stated problem.

10

### Summary of the Invention

According to the present invention there is provided a method of encoding a TRAU frame for a speech signal having a plurality of transport channels, the method including the steps of: determining a coding type for the speech signal; determining a set of bits associated with each transport channel of the speech signal; determining a priority for each transport channel; inserting into a TRAU frame the set of bits associated with the transport channel of highest priority; and repeating the inserting step sequentially for each transport channel in order of priority.

The method may include the steps of: determining any error checking associated with each transport channel; computing any error check bits for each transport channel; and the step of inserting any error check bits associated with such transport channel after the set of bits for that channel.

The method may further include the step of inserting control bits into said TRAU frame. The control bits may be inserted in a reserved location. The control bits may include a transport format combination indicator.

The speech signal may include two transport channels comprising a set of class A bits and a set of class B bits, at least a portion of the class A bits being associated with a cyclic redundancy check, wherein a set of cyclic redundancy check bits are compiled in dependence on all the class A bits, the TRAU frame including, in sequence, the set of class A bits, the set of check bits, and the set of Class B bits.

The TRAU frame may comprise an initial set of control bits. The set of cyclic redundancy bits may be compiled in further dependence on at least one control bit.

In a further aspect the invention provides a method of decoding a received TRAU frame comprising sets of bits corresponding to a plurality of transport channels for a speech signal ordered in sequence in accordance with a priority associated with said channels, the method including the steps of: determining a coding type for the speech signal; locating a set of bits corresponding to each transport channel; and decoding the transport channels in dependence on the recovered data bits in accordance with the determined coding type.

- 10 The method may further comprise the steps of: locating any error check bits associated with each transport channel; and in dependence on the presence of error checking bits, error checking each transport channel.

The method may include the step of locating a set of control bits, said control bits including an indication of the coding type of the speech signal. Said set of control bits may include a transport format combination identifier.

15 A TRAU frame comprising sets of bits corresponding to a plurality of transport channels for a speech signal ordered in sequence in accordance with a priority associated with said channels. At least one transport channel may be associated with error checking bits, said error checking bits being ordered in sequence with the associated data bits.

20 The TRAU frame may further include a set of control bits. The control bits may include an indication of the coding of the speech signal. The indication may be a transport format combination identifier.

In a still further aspect the invention provides a TRAU frame comprising, in sequence, a set of control bits, a set of class A bits, a set of error check bits, and a set of Class B bits, the set of control bits including at least one bit identifying the location of the other sets of bits in the frame.

30 According to another aspect of the invention, there is provided a transcoder/rate adaptor unit adapted to encode a TRAU frame, including: coding detection means for determining a coding type for the speech signal; data determining means for

determining a set of bits associated with each transport channel of the speech signal; priority determining means for determining a priority for each transport channel; insertion means for inserting into a TRAU frame the set of bits associated with the transport channel of highest priority; and the insertion means being adapted to  
5 sequentially insert each transport channel in order of priority.

The transcoder/rate adaptor unit may further include: error check determining means for determining any error checking associated with each transport channel; error check computing means for any error check bits for each transport channel; and the insertion means being further adapted to insert any error check bits associated with  
10 such transport channel after the set of bits for that channel.

The insertion means may be further adapted to insert control bits into said TRAU frame. The control bits may be inserted in a reserved location. The control bits may include a transport format combination indicator.

The speech signal may include two transport channels comprising a set of class A bits and a set of class B bits, at least a portion of the class A bits being associated with a cyclic redundancy check, wherein a set of cyclic redundancy check bits are compiled in dependence on all the class A bits, the insertion means being adapted to include in the TRAU frame, in sequence, the set of class A bits, the set of check bits, and the set of class B bits. The insertion means may be adapted to insert in the  
15 TRAU frame an initial set of control bits.

According to the invention there is provided in another aspect a transcoder/rate adaptor unit adapted to decode a TRAU frame comprising sets of bits corresponding to a plurality of transport channels for a speech signal ordered in sequence in accordance with a priority associated with said channels, including: coding  
25 determining means for determining a coding type for the speech signal; location determining means for locating a set of bits corresponding to each transport channel; and decoding means for decoding the transport channels in dependence on the recovered data bits in accordance with the determined coding type.

The transcoder/rate adaptor unit may further include: error check location means for  
30 locating any error check bits associated with each transport channel; and error

checking means for error checking each transport channel in dependence on the presence of error checking bits.

The transcoder/rate adaptor unit may include control location means for locating a set of control bits, said control bits including an indication of the coding type of the speech signal.

Said set of control bits may include a transport format combination identifier.

According to a further aspect of the invention there may be provided a transcoder/rate adaptor unit for encoding and decoding a TRAU frame comprising sets of bits corresponding to a plurality of transport channels for a speech signal ordered in sequence in accordance with a priority associated with said channels.

At least one transport channel may be associated with error checking bits, said error checking bits being ordered in sequence with the associated data bits.

The TRAU frame may include a set of control bits. The control bits may include an indication of the coding of the speech signal. The indication may be a transport format combination identifier.

In a still further aspect the invention provides a transcoder/rate adaptor unit for encoding and decoding a TRAU frame comprising, in sequence, a set of control bits, a set of class A bits, a set of error check bits, and a set of Class B bits, the set of control bits including at least one bit identifying the location of the other sets of bits in the frame.

In a further aspect, the invention provides a computer program adapted to perform any method described, or any method claimed. In another aspect the invention provides a computer program product for storing computer program code adapted to perform any described method, or any method claimed.

#### Brief Description of the Figures

The invention is now described with regard to an exemplary embodiment by way of reference to the accompanying figures in which:-

Fig. 1 illustrates a GERAN network architecture for implementation of an exemplary embodiment of the invention;

Fig. 2 illustrates a BTS and BSC interconnection for illustration of an exemplary embodiment of the invention;

Fig. 3 illustrates the method steps in the transmission of a signal in an exemplary embodiment of the invention;

5 Fig. 4 illustrates the method steps on receipt of a signal in an exemplary embodiment of the invention;

Fig. 5 illustrates an example of a prior art specific TRAU frame format;

Fig. 6 illustrates an example of a generic TRAU frame format in accordance with an embodiment of the invention; and

10 Fig. 7 illustrates an example of control bit mapping for a generic TRAU frame format in accordance with an embodiment of the invention.

#### Description of the Preferred Embodiments

The invention is described herein by way of reference to particular exemplary  
15 embodiments. In particular the invention is described in the context of a GERAN. It should be understood, however, that the invention is not limited in its applicability to such a specific network scenario.

Referring to Fig. 1, there is illustrated the main components of an example GSM architecture. As illustrated in Fig. 1, a mobile station (MS) 102 accesses PSTN  
20 services 124 via a GERAN 106 and a switching sub-system 118. The GERAN 106 comprises a plurality of base transceiver stations (BTSs) 110, connected to a base station controller (BSC) 114 via Abis interfaces. Each of the GERAN 106 connect to a mobile services switching centre (MSC) 120 in the switching sub-system 118, which in turn connects to a gateway mobile services switching centre (GMSC) 122, which in  
25 turn connects to the PSTN 124.

Embodiments of the invention propose a generic TRAU frame structure for transmission on the Abis interface, which is independent of any specific coding technique. Thus, regardless of any new coding techniques proposed in the future, a single generic TRAU frame structure may be used.

30 Referring to Fig. 2, there is shown a BTS 202, and a BSC 204. The BSC 204 logically includes a TRAU 206. As discussed further hereinbelow, the TRAU is

adapted, in accordance with embodiments of the invention, to include a converter block 208, in addition to a plurality of codecs 210. The BSC receives signals from the switching sub-system on an interface 216, and transmits signals to the switching sub-system on the interface 216. An interface 214 is provided between the BTS 202 and the BSC 204, being the Abis interface. TRAU frames are carried on the Abis interface 214.

The codecs 210 represent a number of codec functions available for the TRAU interface. In the example of Fig. 2, four codecs are shown. The number of codecs is implementation-dependent, and the invention is not limited in its applicability to any particular number of codecs being provided in the TRAU 206.

The invention is not concerned with the way in which a particular coding scheme is selected. The selection of a particular coding scheme is outside the scope of the invention.

For the purposes of describing an embodiment of the invention, it is assumed that the codecs 210 are adaptive multi-rate (AMR) codecs.

With reference to Fig. 3, there is described a preferred embodiment of the invention applied to a transmission from the network to a mobile station. As is known in the art, a signal for transmission is received on the interface 216 of the BSC 204, at a rate of 64 kbps. This signal is received at the TRAU 206 of the BSC 204, and provided to the appropriate one of the plurality of codecs 210 in accordance with the coding scheme in use.

As represented by step 302 in Fig. 3, initially an encoding step takes place in the selected coder 210. This is the "normal" coding step associated with the codec. This is a speech encoder operation which generates the speech coefficients, i.e. the payload for the TRAU frame. As described further hereinbelow, the converter 208 then builds a TRAU frame. As such, the converter 208 may be functionally considered a "TRAU build block".

Referring to Fig. 5, there is illustrated a TRAU frame built for an AMR codec in accordance with current technologies. As will be understood from the foregoing description, in the prior art the TRAU frame built will be specific to the speech coding being used in the codec 210. As can be seen in Fig. 5, the TRAU frame 500

comprises a set of control bits 502, a set of class A bits 516, and a set of class B bits 514. The class B bits comprise a set of bits to which no error check is applied. There are further four subsets of class A bits 506, 508, 510, 512 to which error checking is applied. The TRAU frame is a 20ms frame, and for error checking the frame is split into four sub-frames of 5ms each. A cyclic redundancy check (CRC) is applied to those class A bits in each 5ms sub-frame. Thus, as shown in Fig. 5, each of the class A bit blocks 506, 508, 510, 512 has a CRC check sum associated therewith. An exception to this is the CRC associated with the first sub-frame 506, which is also applied to certain class A bits 504 that are not associated with a particular 5ms sub-frame and the control bits 502. Thus, the selected codec 210 encodes the signal in the normal way, and generates such signal on an output 211 of the selected codec 210.

Turning again to Figure 3, as represented by step 302 initially a speech encoding step takes place in the selected coder 210 in order to generate the speech coefficients for transmission, and then the converter block 208 builds a TRAU frame, as described further hereinbelow with reference to Fig. 3, in accordance with a set of rules. In a step 304, the converter block 208 identifies the coding type used to encode the speech signal, and consequently the transport format combination (TFC) for the speech signal. Each codec type has associated with it a transport format combination (TFC) which is known by the BSC and by the BTS. If the TRAU is located remotely from the BTS and BSC, then the transport format combination set (TFCS) is made known to the remote TRAU through appropriate signalling at call set-up.

In dependence upon such identification of the TFC, in a step 306 the converter block 208 is able to identify the transport channels present, their priority, the bits which belong to each transport channel and to identify whether a CRC is required. In the example of Fig. 5, the specific encoded TRAU frame 500 includes two transport channels. A first transport channel comprises the class A bits 516 and a second transport channel comprises the class B bits 514. The class A bits have a higher priority, or importance, than the class B bits. In prior art codecs, the class A bits and class B bits of the encoded speech are normally dispersed according to the design of

the encoder, the location of which can be determined with a custom TRAU frame. In the case of services that will be supported by the generic TRAU frame of the invention, the converter 208 orders the bits according to subjective importance, starting from the most important bit first.

5           In a step 310, the converter 208 applies a CRC error checking code to the bits of the transport channels which require error checking.

          In a step 312, the converter 208 then prepares to insert the data of the transport channels and any associated error checking bits into a generic TRAU frame. In a step 314, the converter 208 inserts the bits of the lowest transport  
10   channel into the TRAU frame. The 'lowest' transport channel is the channel having the bits considered to be of the highest importance. In a step 316 any error check bits, such as CRC bits, associated with the transport channel are then inserted into the frame by the converter.

          As denoted by step 318, the steps 314 and 316 are then repeated for each  
15   further transport channel. The transport channels are dealt with in order of ascendancy, i.e. in order to number. This is on the basis that the transport channels are numbered in order of importance. Thus, the most important channels are processed first, and inserted into the frame first

          In a step 320, the converter inserts the TFCI and other control bits into the  
20   frame. It should be noted that this step is not dependent on the transport channels having already been inserted. The location of all the control bits is preferably reserved, and therefore the control bits may be inserted before, during or after insertion of the transport channel bits.

          The characteristic of the generic TRAU frame is that its format will be adapted  
25   at call set-up for each transport format combination, preferably using the messages that are used to configure the flexible layer one. These messages provide for each transport format combination: the number of active transport channels; the number of bits that are sent over each active transport channel; and an indication of which bits require error checking, e.g. CRC checking.

30           Referring to Fig. 6, the generic TRAU frame for a transport format combination comprising two transport channels is illustrated. In this example, the first transport

channel carrying class A bits requires CRC protection and the second transport channel carrying class B bits which does not require CRC protection. The generic TRAU frame 600 comprises a set of control bits 608, a set of class A bits 616, a CRC 606 which has been computed for all of the class A bits 616 and the control bits 608, and a set of class B bits 614. In general, the bits belonging to each transport channel are ordered within the TRAU frame starting from the lowest transport channel number followed by any associated CRC (if any exists), to the highest transport channel number followed by any associated CRC (if any exists). The first CRC is also preferably applied to the control bits, where the control bits are required to be CRC protected. In an alternative to this, a CRC for the control bits may be included separately, for example where a transport format combination is used which does not consist of a transport channel which requires a CRC.

To signal the transport format combination that is currently in use (and consequently the TRAU frame format), a transport format combination identifier is also preferably carried within the generic TRAU frame, preferably within the control bits 608.

All of the control bits are in a fixed location in accordance with the generic TRAU frame structure, and are thus preferably independent of the coding technique. The implementation for a preferred set of control bits is discussed further hereinafter. In a preferred embodiment of the invention, the existing TRAU control bits known from GSM signalling, and more specifically from AMR techniques, is utilised in the generic TRAU. However it is envisaged that in embodiments adapted control bits may be applied.

Referring to Fig. 7, the use of control bits in the generic TRAU frame 600 is illustrated. The identifiers that are currently used in the TRAU frames to indicate the information content are "frame\_classification" 702, "RIF" (request indicator flag) 704, "CMI/CMR" (codec mode indicator/codec mode request) 706, "no\_speech\_classification" 708.

These parameters may also be used to signal up to eight speech modes, as determined by the three bit CMI/CMR field 706. The parameters may be used to signal up to eight no-speech modes, as determined by the 3 bit

no\_speech\_classification field 708. As such, they may be used to signal up to 16 transport format combinations (TFCs).

On the assumption that 16 TFCs are adequate for any new speech service over flexible layer one (FLO), then there is no requirement to change the TRAU frame control signalling to support FLO. All that is needed is a translation between the coding of these flags, and the coding of a 4 bit transport format combination identifier (TFCI) over the air interface. Fig. 7 provides a suggested translation from the "frame\_classification" 702, "RIF" (request indicator flag) 704, "CMI/CMR" (codec mode indicator/codec mode request) 706, and "no\_speech\_classification" to a "TFCI" (transport format combination identifier) 710 in an embodiment of the invention.

The codec mode indicated in the control bits of the generic TRAU frame 600, confirms to a codec at the receiver side how many transport channels there are in the generic TRAU frame, where the data of the transport channels can be found, and whether any error checking applies to any portion of the data, and where such error checking information may be found. Thus no information needs to be transmitted in the generic TRAU frame itself as to where the information contained therein is located. This can be determined in dependence on the identity of the coding type contained in the TRAU frame control bits.

Referring to Figure 3, once the TRAU frame is constructed, it is transmitted on the Abis interface as denoted by step 322. Thus, in accordance with the invention a generic TRAU frame format is used on the Abis interface 214 between the BTS 202 and the BSC 204.

It will be understood that in the mobile station, a functional equivalent to the converter 208 must be provided in order to convert the received format into the specific format associated with the coding technique. This can be achieved by such function extracting the identity of the coding from control bits, and applying an appropriate mapping function to map the bits retrieved into the required format associated with the coding technique, for decoding.

Referring to Fig. 4, there is now described the reverse operation in the converter 208, for a signal received on the Abis interface 214 having a generic TRAU frame structure.

In such example, the equivalent converter function in the mobile station is assumed to have encoded a speech signal such that a generic TRAU frame format, is received and sent on the Abis interface from the BTS 202 to the BSC 204.

Referring to Fig. 4, in a step 402 the converter block 208 receives a generic  
5 TRAU frame of the format shown in Fig. 6.

In a step 404, the converter 208 determines the transport format combination (TFC), i.e. the coding technique associated with the transmission. This is determined from the transport format combination identifier (TFCI) bits found in the control bits 608 of the generic TRAU frame 600.

10 Based on the determination of the TFC, in a step 406 the converter 208 identifies the location of the bits of each transport channel and any associated error checking bits, and retrieves the transport channels and associated CRC (if any exist) from the generic TRAU frame. The location of the bits can be determined based on knowledge of the encoding techniques used, as discussed hereinabove. Thus, for the  
15 generic TRAU frame of Fig. 6, the class A bits 616 and the class B bits 614 are retrieved from the location within the generic TRAU frame for this type of coding.

In a step 408, any error checking is performed. Thus, for the example of Fig. 6, a CRC check is performed on the class A bits 616, and compared with the transmitted CRC checks sum 606.

20 Thereafter, depending on the outcome of the CRC check, the TRAU performs either error concealment procedures, or sends the encoded signal to the one of the codecs 210 associated with the coding used, and in a step 416 decoding for the encoded signal is applied.

It should be noted that in the above described embodiments, on transmission  
25 the signal to be transmitted is first encoded in accordance with the specific coding technique, before the converter block 208 converts it into a generic format. In embodiments, it is envisaged that the codec specific encoding may be bypassed, and the encoding into the generic TRAU frame format performed directly. However the insertion of the converter 208 in front of the codec 210 in Fig. 2, such that encoding  
30 and decoding applies to all transmissions, simplifies the implementation of the invention.

The use of a generic TRAU frame format in accordance with the invention, and the described embodiments herein, reduces the time and work needed during the standardisation process for any new speech codec/data service, and reduces the time and work needed during the implementation process for any new speech  
5 codec/data service, or for existing codecs which have yet to be implemented (for example AMR-WB).

The complexity of the implementation of the generic TRAU frame format is reduced if the same configuration message to configure the flexible layer one is used to configure the generic TRAU frame, and the signalling flags within the existing  
10 TRAU frame structure are reused to signal the TFCI.

In current known implementations, such as AMR coding techniques, the unequal error detection (UED) applied on the Abis interface is stricter than on the air interface. However, in practice, the Abis interface is more reliable than the air interface. The use of the generic TRAU frame format as proposed herein, enables  
15 the UED applied on the Abis interface to be adapted such that it is the same as that applied on the air interface in any given implementation. The granularity of the UED may therefore be reduced to that used over the air interface. This is illustrated by the examples of Figs. 5 and 6, where in Fig. 6 the granularity of the UED in the generic TRAU frame format is adapted to be thus used over the air interface. The advantage  
20 of this approach is that it avoids the need to signal to the BTS the location of the bits belonging to each 5ms sub-frame.

The invention has been described herein by way of reference to embodiments applied in the GERAN, and more specifically in association with the introduction of flexible layer one in the GERAN. The invention is not, however, limited to such a  
25 specific environment. More generally, the invention applies to any scenario where there is a requirement for a TRAU frame.

One skilled in the art will appreciate the possible adaptations and modifications to the invention as described in the embodiments. The scope of protection afforded by the invention is defined by the appended claims.

Claims

1. A method of encoding a TRAU frame for a speech signal having a plurality of transport channels, the method including the steps of:
  - 5 a) determining a coding type for the speech signal;
  - b) determining a set of bits associated with each transport channel of the speech signal;
  - c) determining a priority for each transport channel;
  - d) inserting into a TRAU frame the set of bits associated with the transport  
10 channel of highest priority; and
  - e) repeating the inserting step sequentially for each transport channel in order of priority.
2. A method according to claim 1 further including the steps of:
  - 15 a) determining any error checking associated with each transport channel;
  - b) computing any error check bits for each transport channel; and
  - c) the step of inserting further comprising inserting any error check bits associated with such transport channel after the set of bits for that channel..
- 20 3. A method according to claim 1 or claim 2 further including the step of inserting control bits into said TRAU frame.
4. A method according to claim 3 wherein the control bits are inserted in a reserved location.  
25
5. A method according to claim 3 or claim 4 in which the control bits include a transport format combination indicator.
6. A method according to any one of claims 2 to 5 in which the speech signal  
30 includes two transport channels comprising a set of class A bits and a set of class B bits, at least a portion of the class A bits being associated with a cyclic

redundancy check, wherein a set of cyclic redundancy check bits are compiled in dependence on all the class A bits, the TRAU frame including, in sequence, the set of class A bits, the set of check bits, and the set of Class B bits.

5 7. A method according to claim 6 wherein the TRAU frame comprises an initial set of control bits.

8. A method according to claim 7 wherein the set of cyclic redundancy bits are compiled in further dependence on at least one control bit.

10

9. A method of decoding a received TRAU frame comprising sets of bits corresponding to a plurality of transport channels for a speech signal ordered in sequence in accordance with a priority associated with said channels, the method including the steps of:

15

- a) determining a coding type for the speech signal;
- b) locating a set of bits corresponding to each transport channel; and
- c) decoding the transport channels in dependence on the recovered data bits in accordance with the determined coding type.

20

10. A method according to claim 9 further comprising the steps of:

- a) locating any error check bits associated with each transport channel; and
- b) in dependence on the presence of error checking bits, error checking each transport channel.

25

11. A method according to claim 9 or claim 10 wherein the method includes the step of locating a set of control bits, said control bits including an indication of the coding type of the speech signal.

30

12. A method according to claim 11 wherein said set of control bits includes a transport format combination identifier.

13.A TRAU frame comprising sets of bits corresponding to a plurality of transport channels for a speech signal ordered in sequence in accordance with a priority associated with said channels.

5 14.A TRAU frame according to claim 13 in which at least one transport channel is associated with error checking bits, said error checking bits being ordered in sequence with the associated data bits.

10 15.A TRAU frame according to claim 13 or claim 14 further including a set of control bits.

16.A TRAU frame according to claim 15 wherein the control bits include an indication of the coding of the speech signal.

15 17.A TRAU frame according to claim 16 wherein the indication is a transport format combination identifier.

20 18.A TRAU frame comprising, in sequence, a set of control bits, a set of class A bits, a set of error check bits, and a set of Class B bits, the set of control bits including at least one bit identifying the location of the other sets of bits in the frame.

19.A transcoder/rate adaptor unit adapted to encode a TRAU frame, including:

- 25 a) coding detection means for determining a coding type for the speech signal;  
b) data determining means for determining a set of bits associated with each transport channel of the speech signal;  
c) priority determining means for determining a priority for each transport channel;  
d) insertion means for inserting into a TRAU frame the set of bits associated with the transport channel of highest priority; and  
30 e) the insertion means being adapted to sequentially insert each transport channel in order of priority.

20. A transcoder/rate adaptor unit according to claim 19 further including:
- a) error check determining means for determining any error checking associated with each transport channel;
  - 5 b) error check computing means for any error check bits for each transport channel; and
  - c) the insertion means being further adapted to insert any error check bits associated with such transport channel after the set of bits for that channel..
- 10 21. A transcoder/rate adaptor unit according to claim 19 or claim 20 wherein the insertion means is further adapted to insert control bits into said TRAU frame.
22. A transcoder/rate adaptor unit according to claim 21 wherein the control bits are inserted in a reserved location.
- 15 23. A transcoder/rate adaptor unit according to claim 21 or claim 23 in which the control bits include a transport format combination indicator.
- 20 24. A transcoder/rate adaptor unit according to any one of claims 20 to 23 in which the speech signal includes two transport channels comprising a set of class A bits and a set of class B bits, at least a portion of the class A bits being associated with a cyclic redundancy check, wherein a set of cyclic redundancy check bits are compiled in dependence on all the class A bits, the insertion means being adapted to include in the TRAU frame, in sequence, the set of class A bits, the set of check bits, and the set of class B bits.
- 25 25. A transcoder/rate adaptor unit according to claim 24 wherein the insertion means is adapted to insert in the TRAU frame an initial set of control bits.
- 30 26. A transcoder/rate adaptor unit adapted to decode a TRAU frame comprising sets of bits corresponding to a plurality of transport channels for a speech signal

ordered in sequence in accordance with a priority associated with said channels, including:

- a) coding determining means for determining a coding type for the speech signal;
- b) location determining means for locating a set of bits corresponding to each transport channel; and
- c) decoding means for decoding the transport channels in dependence on the recovered data bits in accordance with the determined coding type.

27. A transcoder/rate adaptor unit according to claim 26 further including:

- a) error check location means for locating any error check bits associated with each transport channel; and
- b) error checking means for error checking each transport channel in dependence on the presence of error checking bits.

28. A transcoder/rate adaptor unit according to claim 26 or claim 27 including control location means for locating a set of control bits, said control bits including an indication of the coding type of the speech signal.

29. A transcoder/rate adaptor unit according to claim 28 wherein said set of control bits includes a transport format combination identifier.

30. A transcoder/rate adaptor unit for encoding and decoding a TRAU frame comprising sets of bits corresponding to a plurality of transport channels for a speech signal ordered in sequence in accordance with a priority associated with said channels.

31. A transcoder/rate adaptor unit according to claim 30 in which at least one transport channel is associated with error checking bits, said error checking bits being ordered in sequence with the associated data bits.

- 32.A transcoder/rate adaptor unit according to claim 30 or claim 31 wherein the TRAU frame includes a set of control bits.
- 5 33.A transcoder/rate adaptor unit according to claim 32 wherein the control bits include an indication of the coding of the speech signal.
- 34.A transcoder/rate adaptor unit according to claim 33 wherein the indication is a transport format combination identifier.
- 10 35.A transcoder/rate adaptor unit for encoding and decoding a TRAU frame comprising, in sequence, a set of control bits, a set of class A bits, a set of error check bits, and a set of Class B bits, the set of control bits including at least one bit identifying the location of the other sets of bits in the frame.
- 15 36.A method of encoding or decoding a transcoder/rate adaptor unit frame substantially as described herein with reference to any one of Figures 1 to 5 or 7 to 8.
- 20 37.A transcoder/rate adaptor unit substantially as described herein with reference to any one of Figures 1 to 5 or 7 to 8.



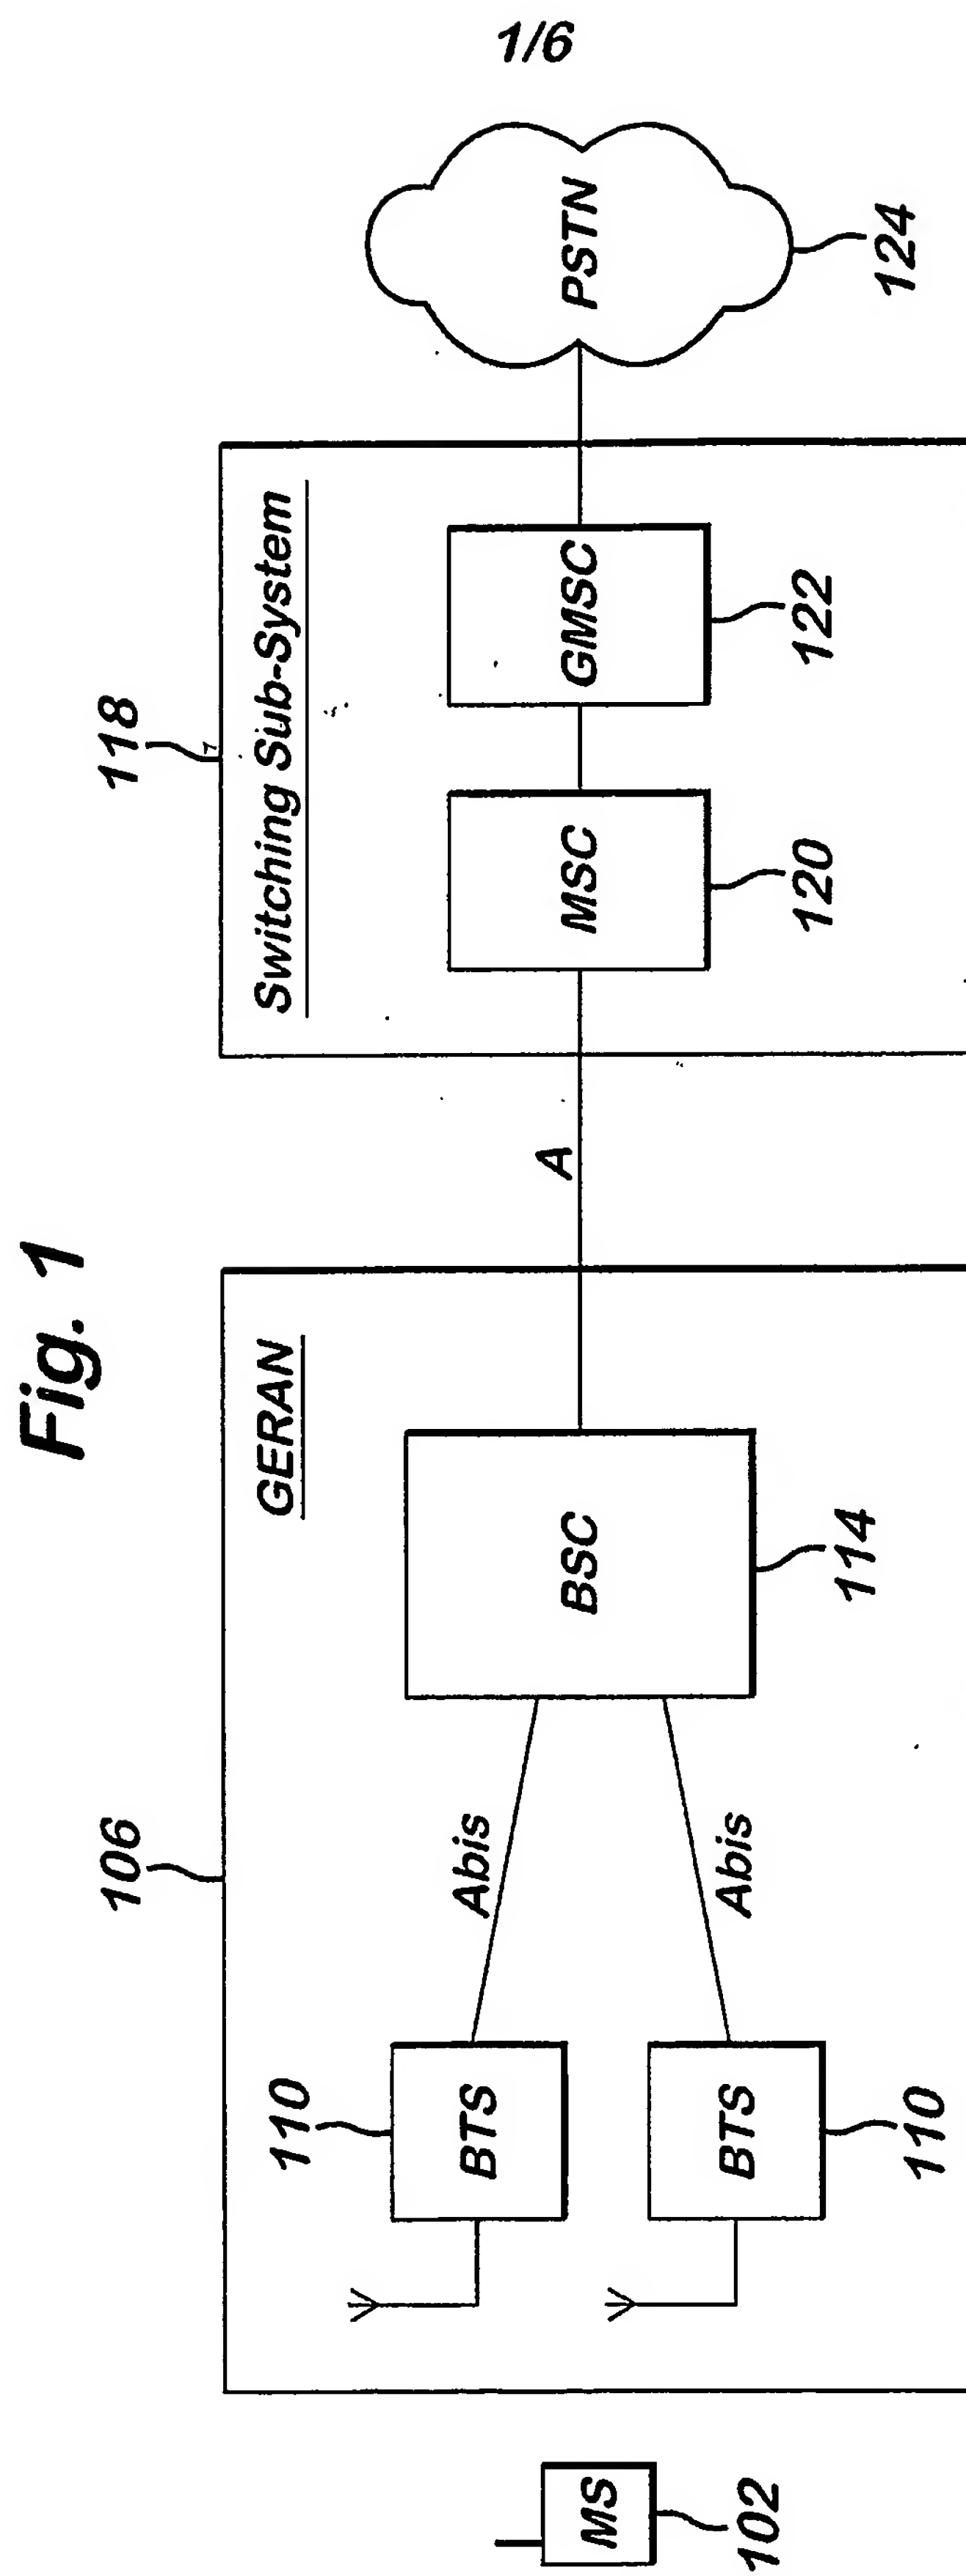



Fig. 2

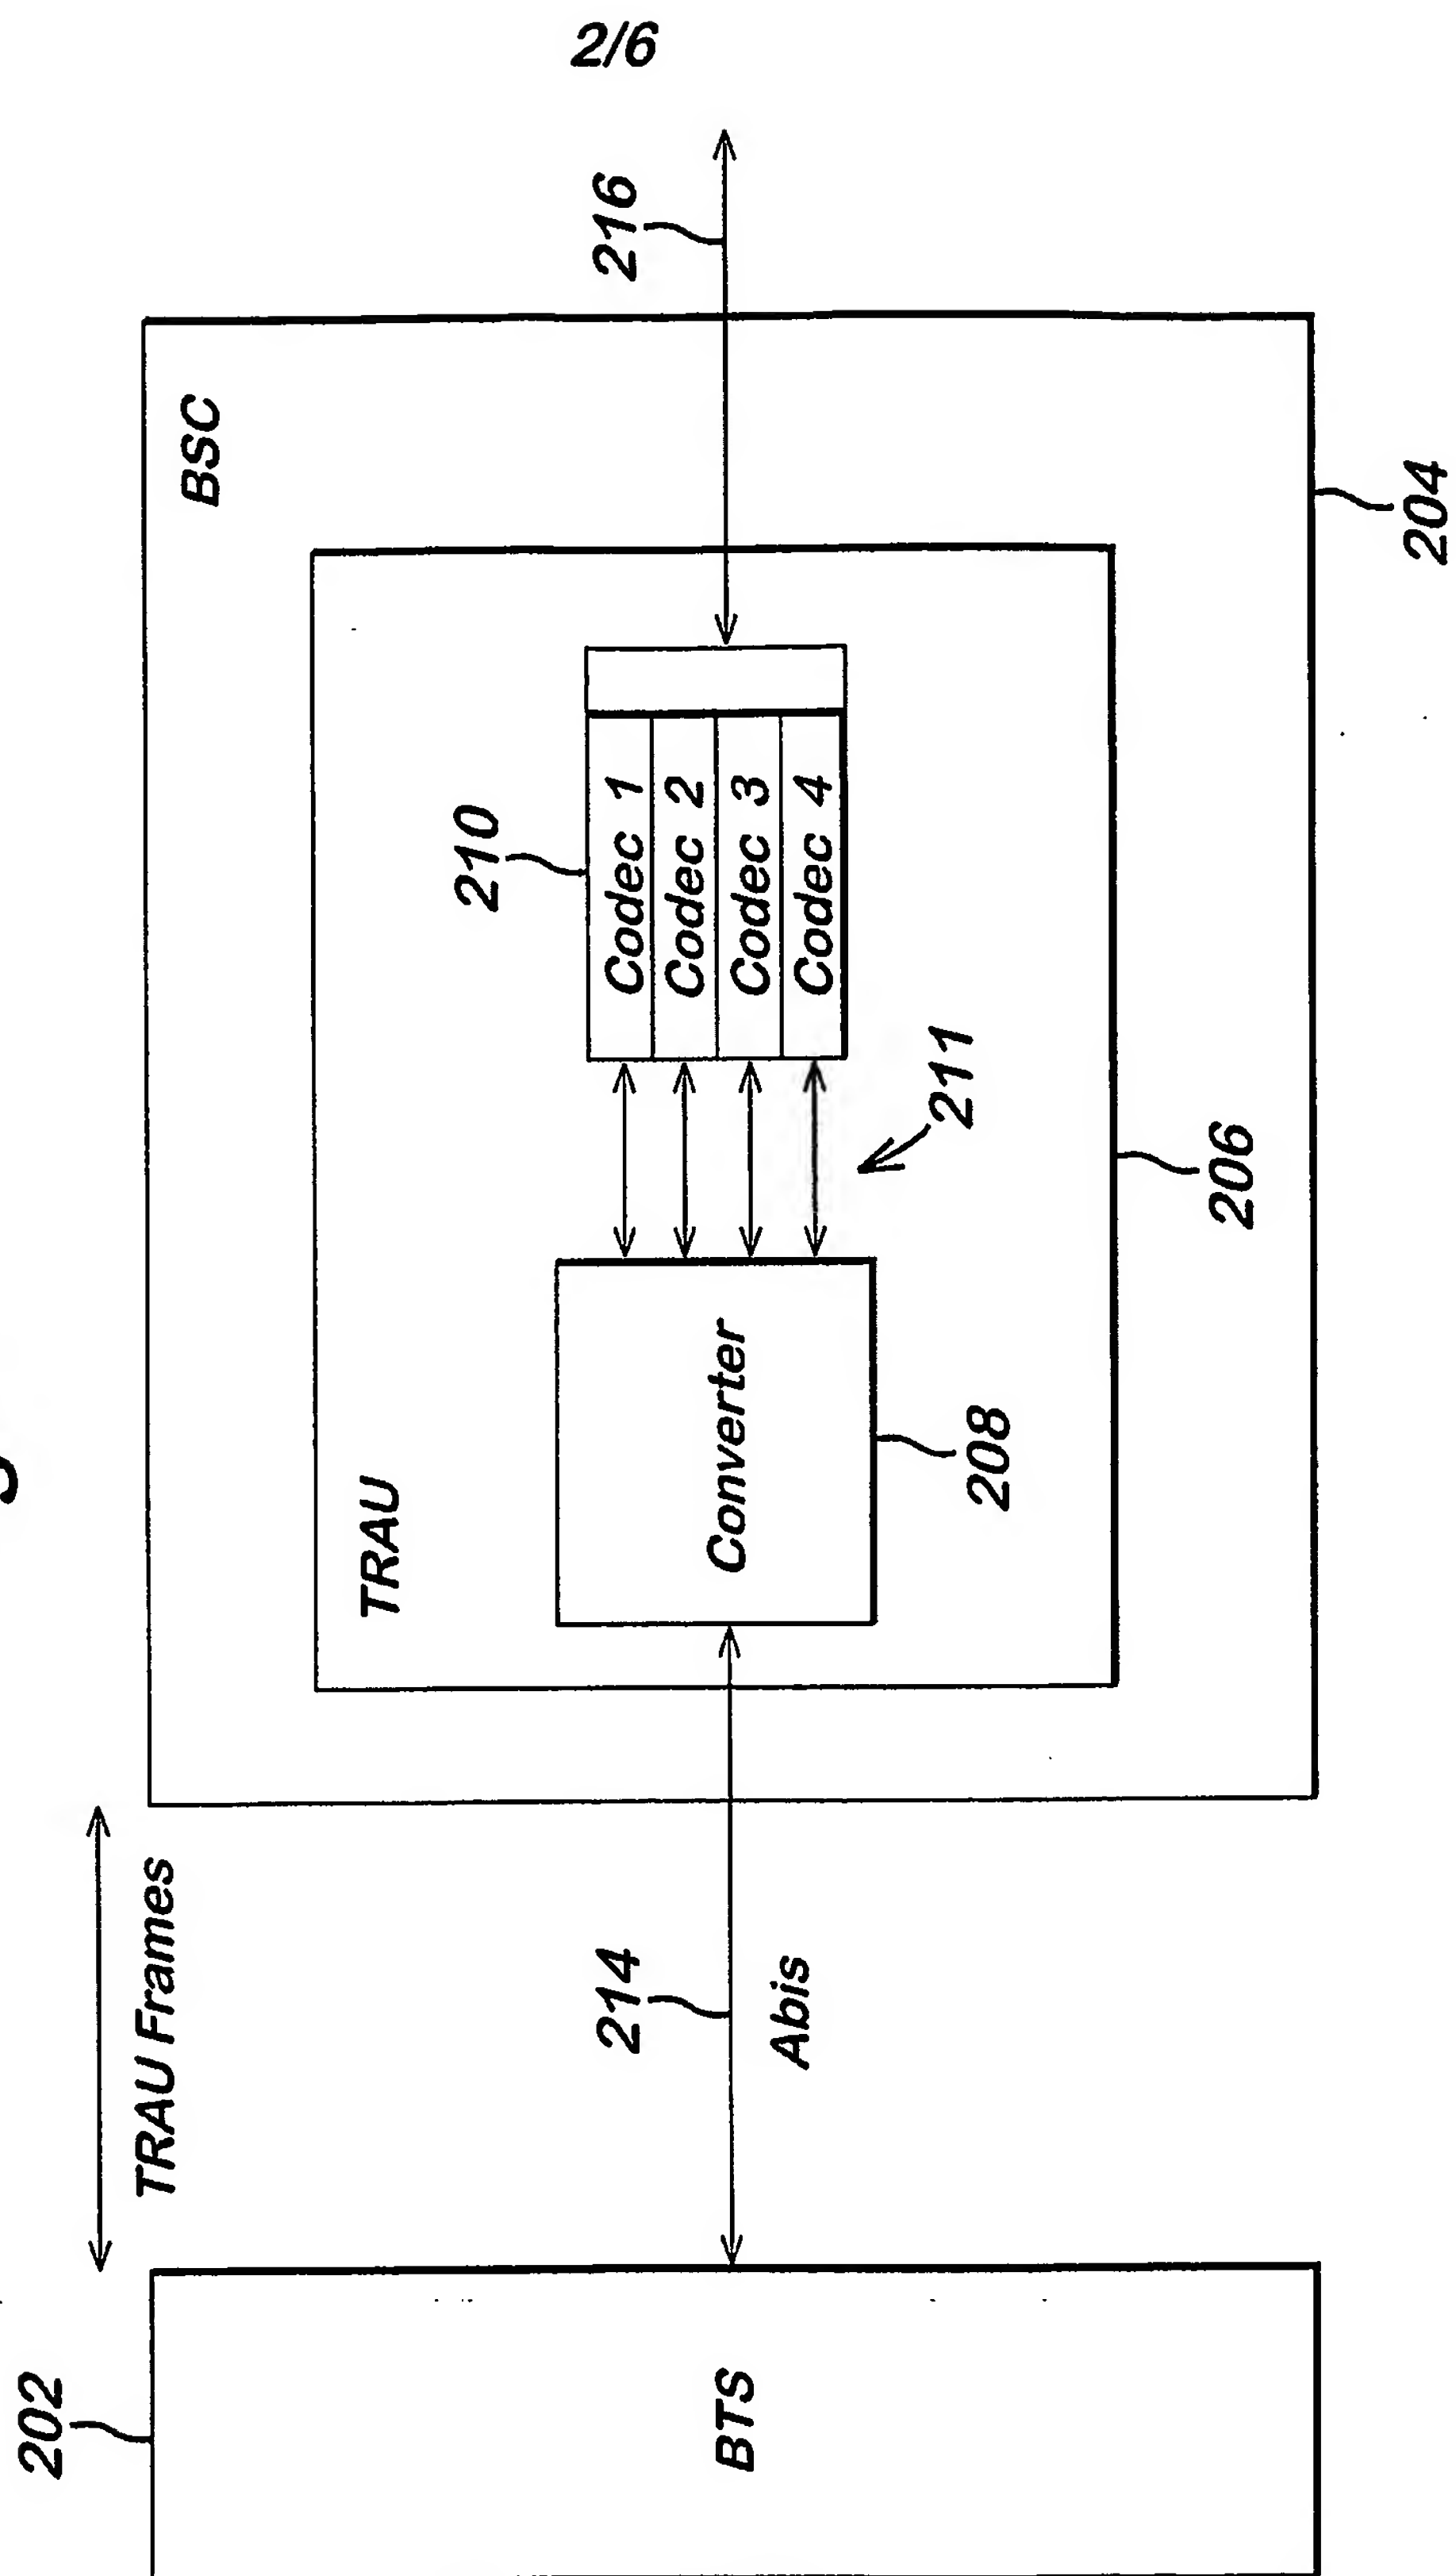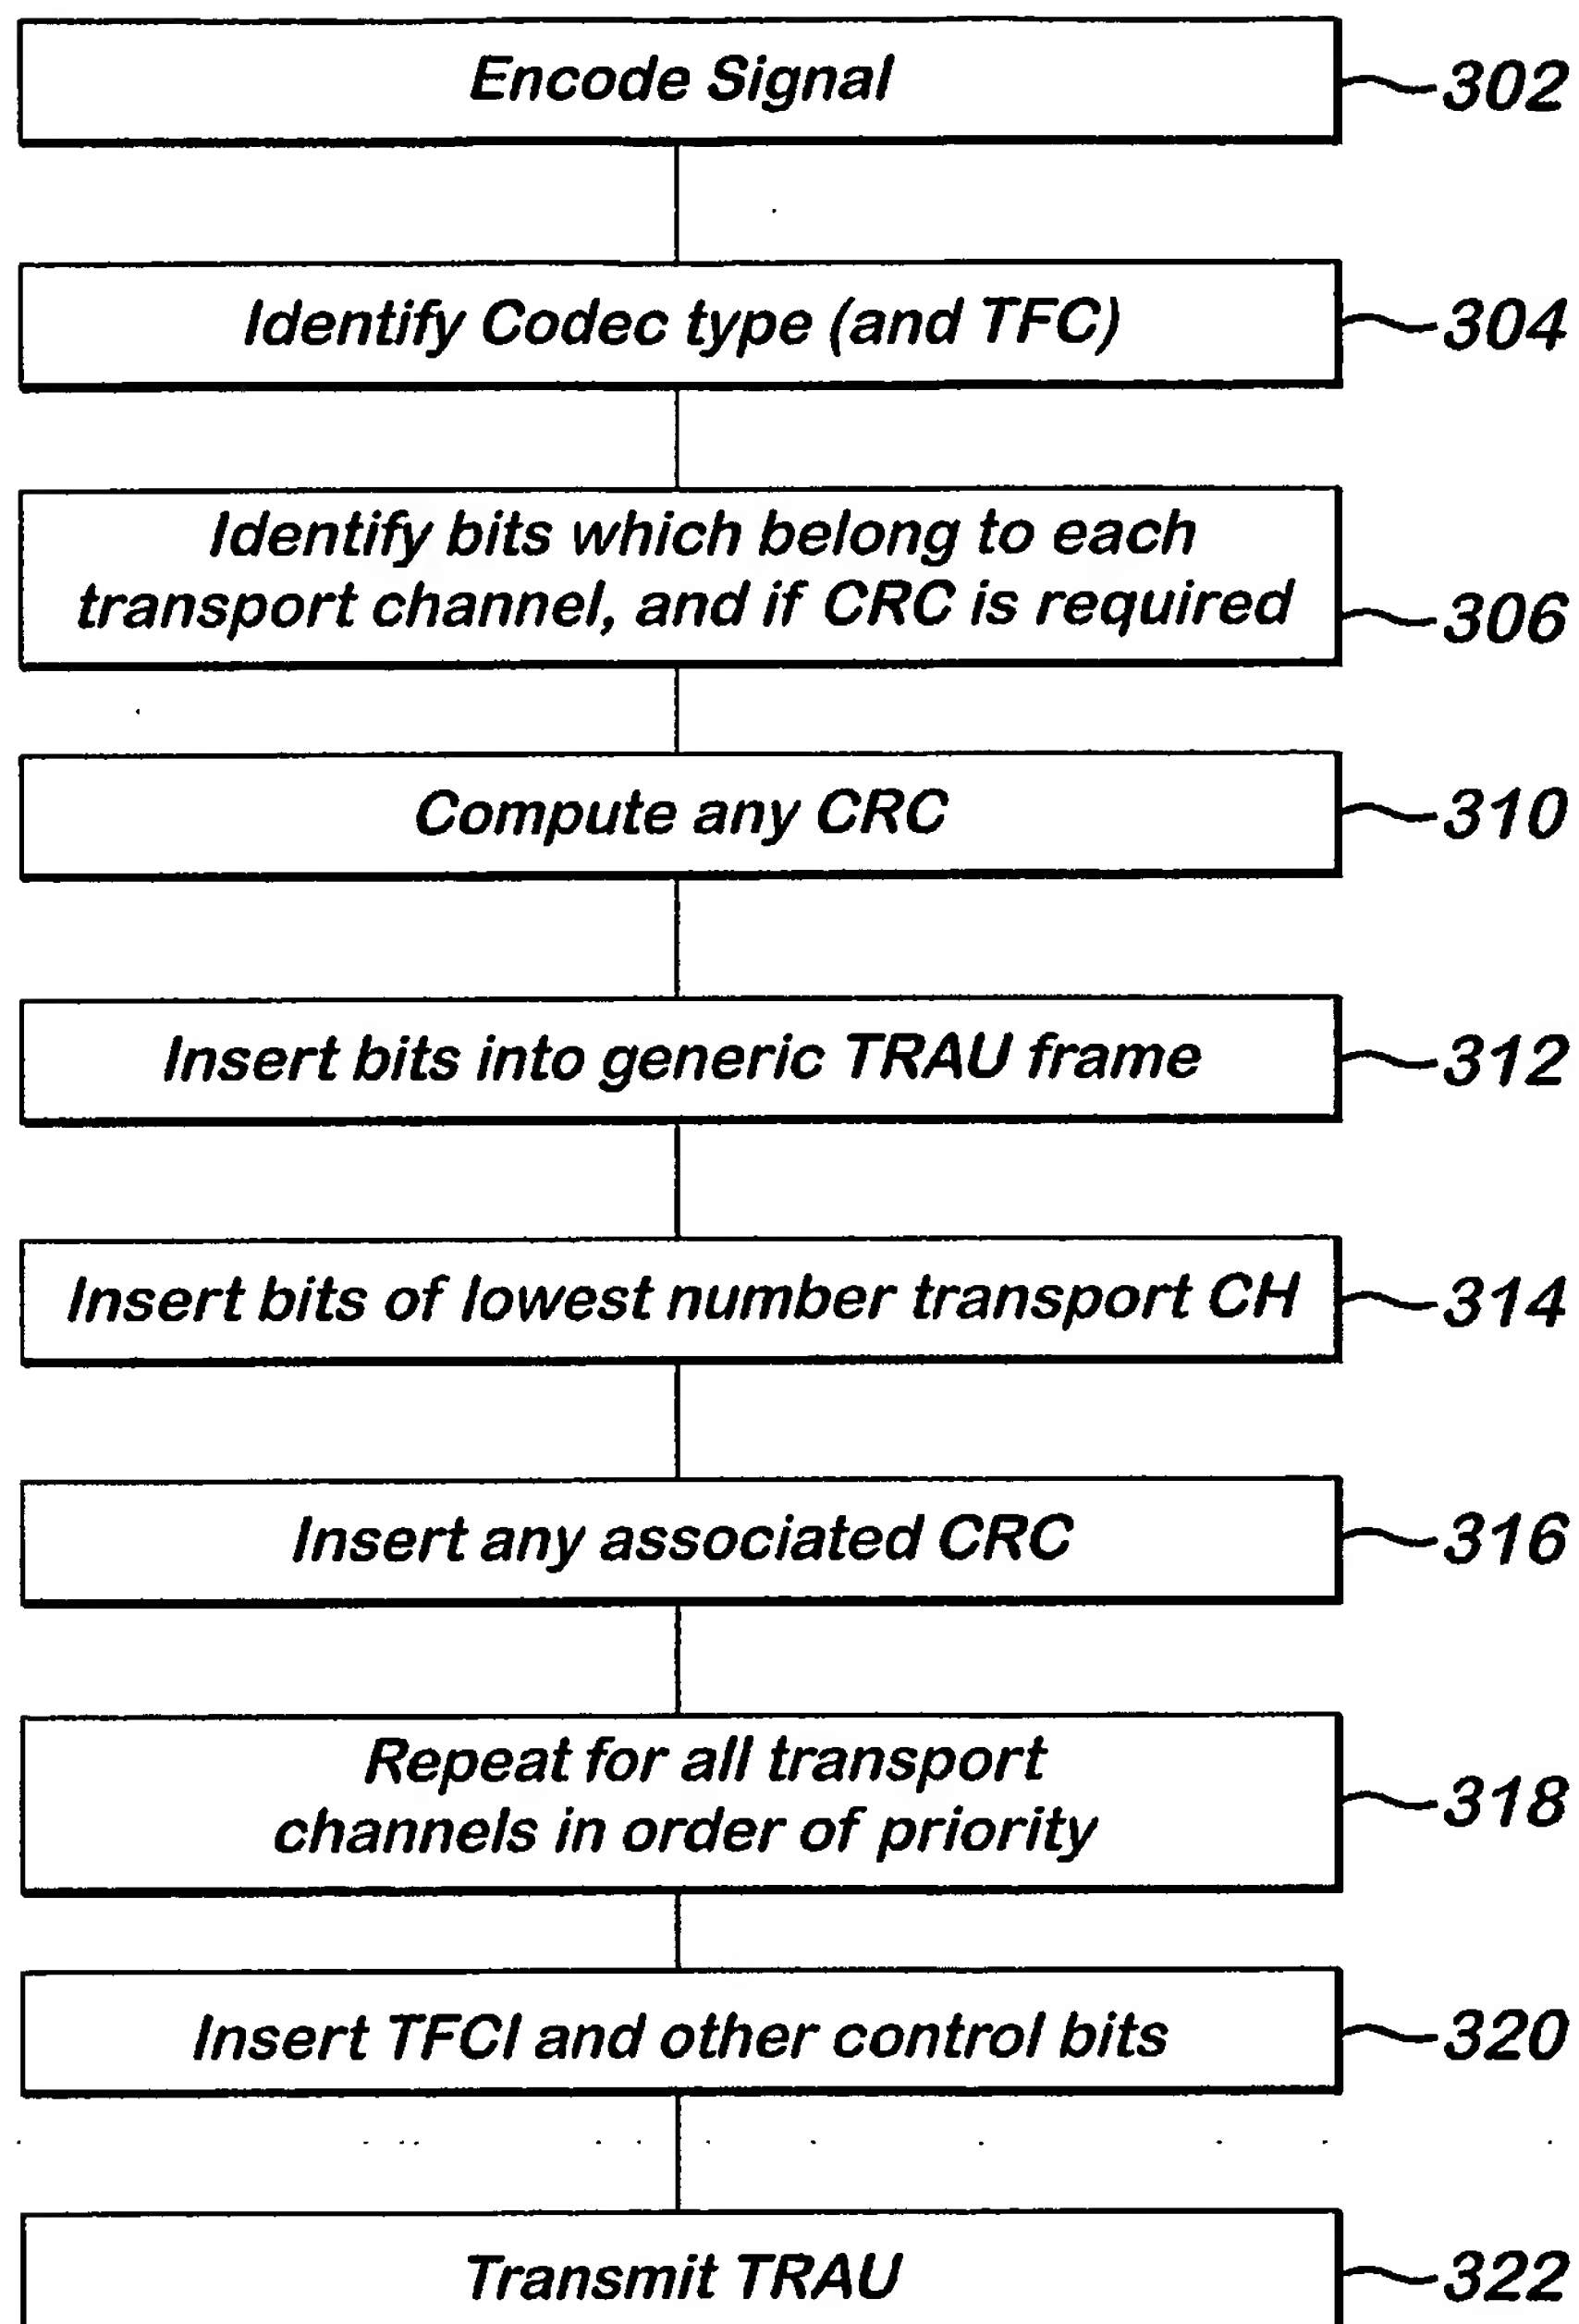

3/6

**Fig. 3**

4/6

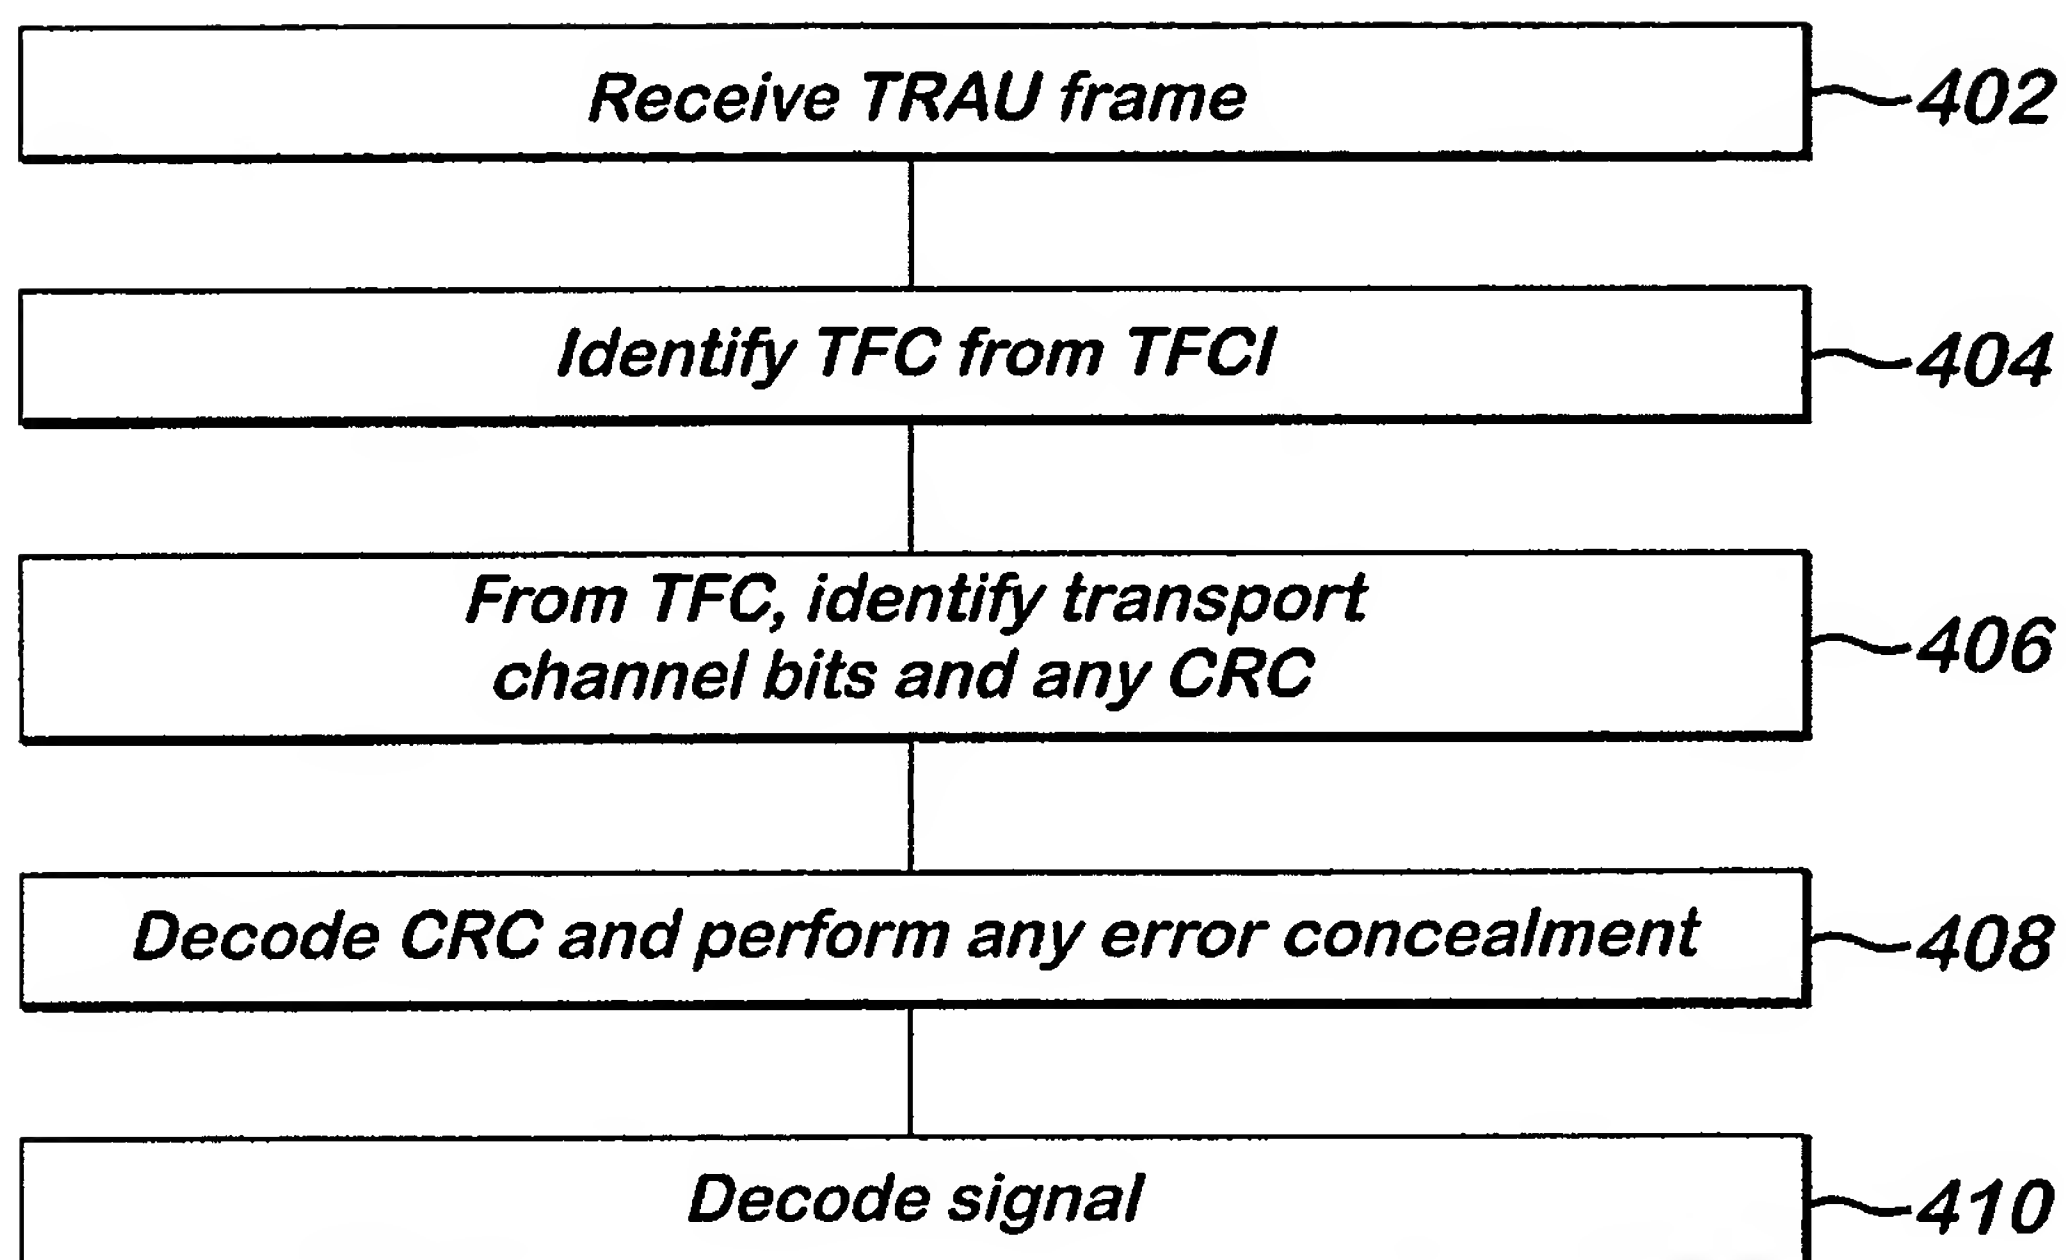**Fig. 4**

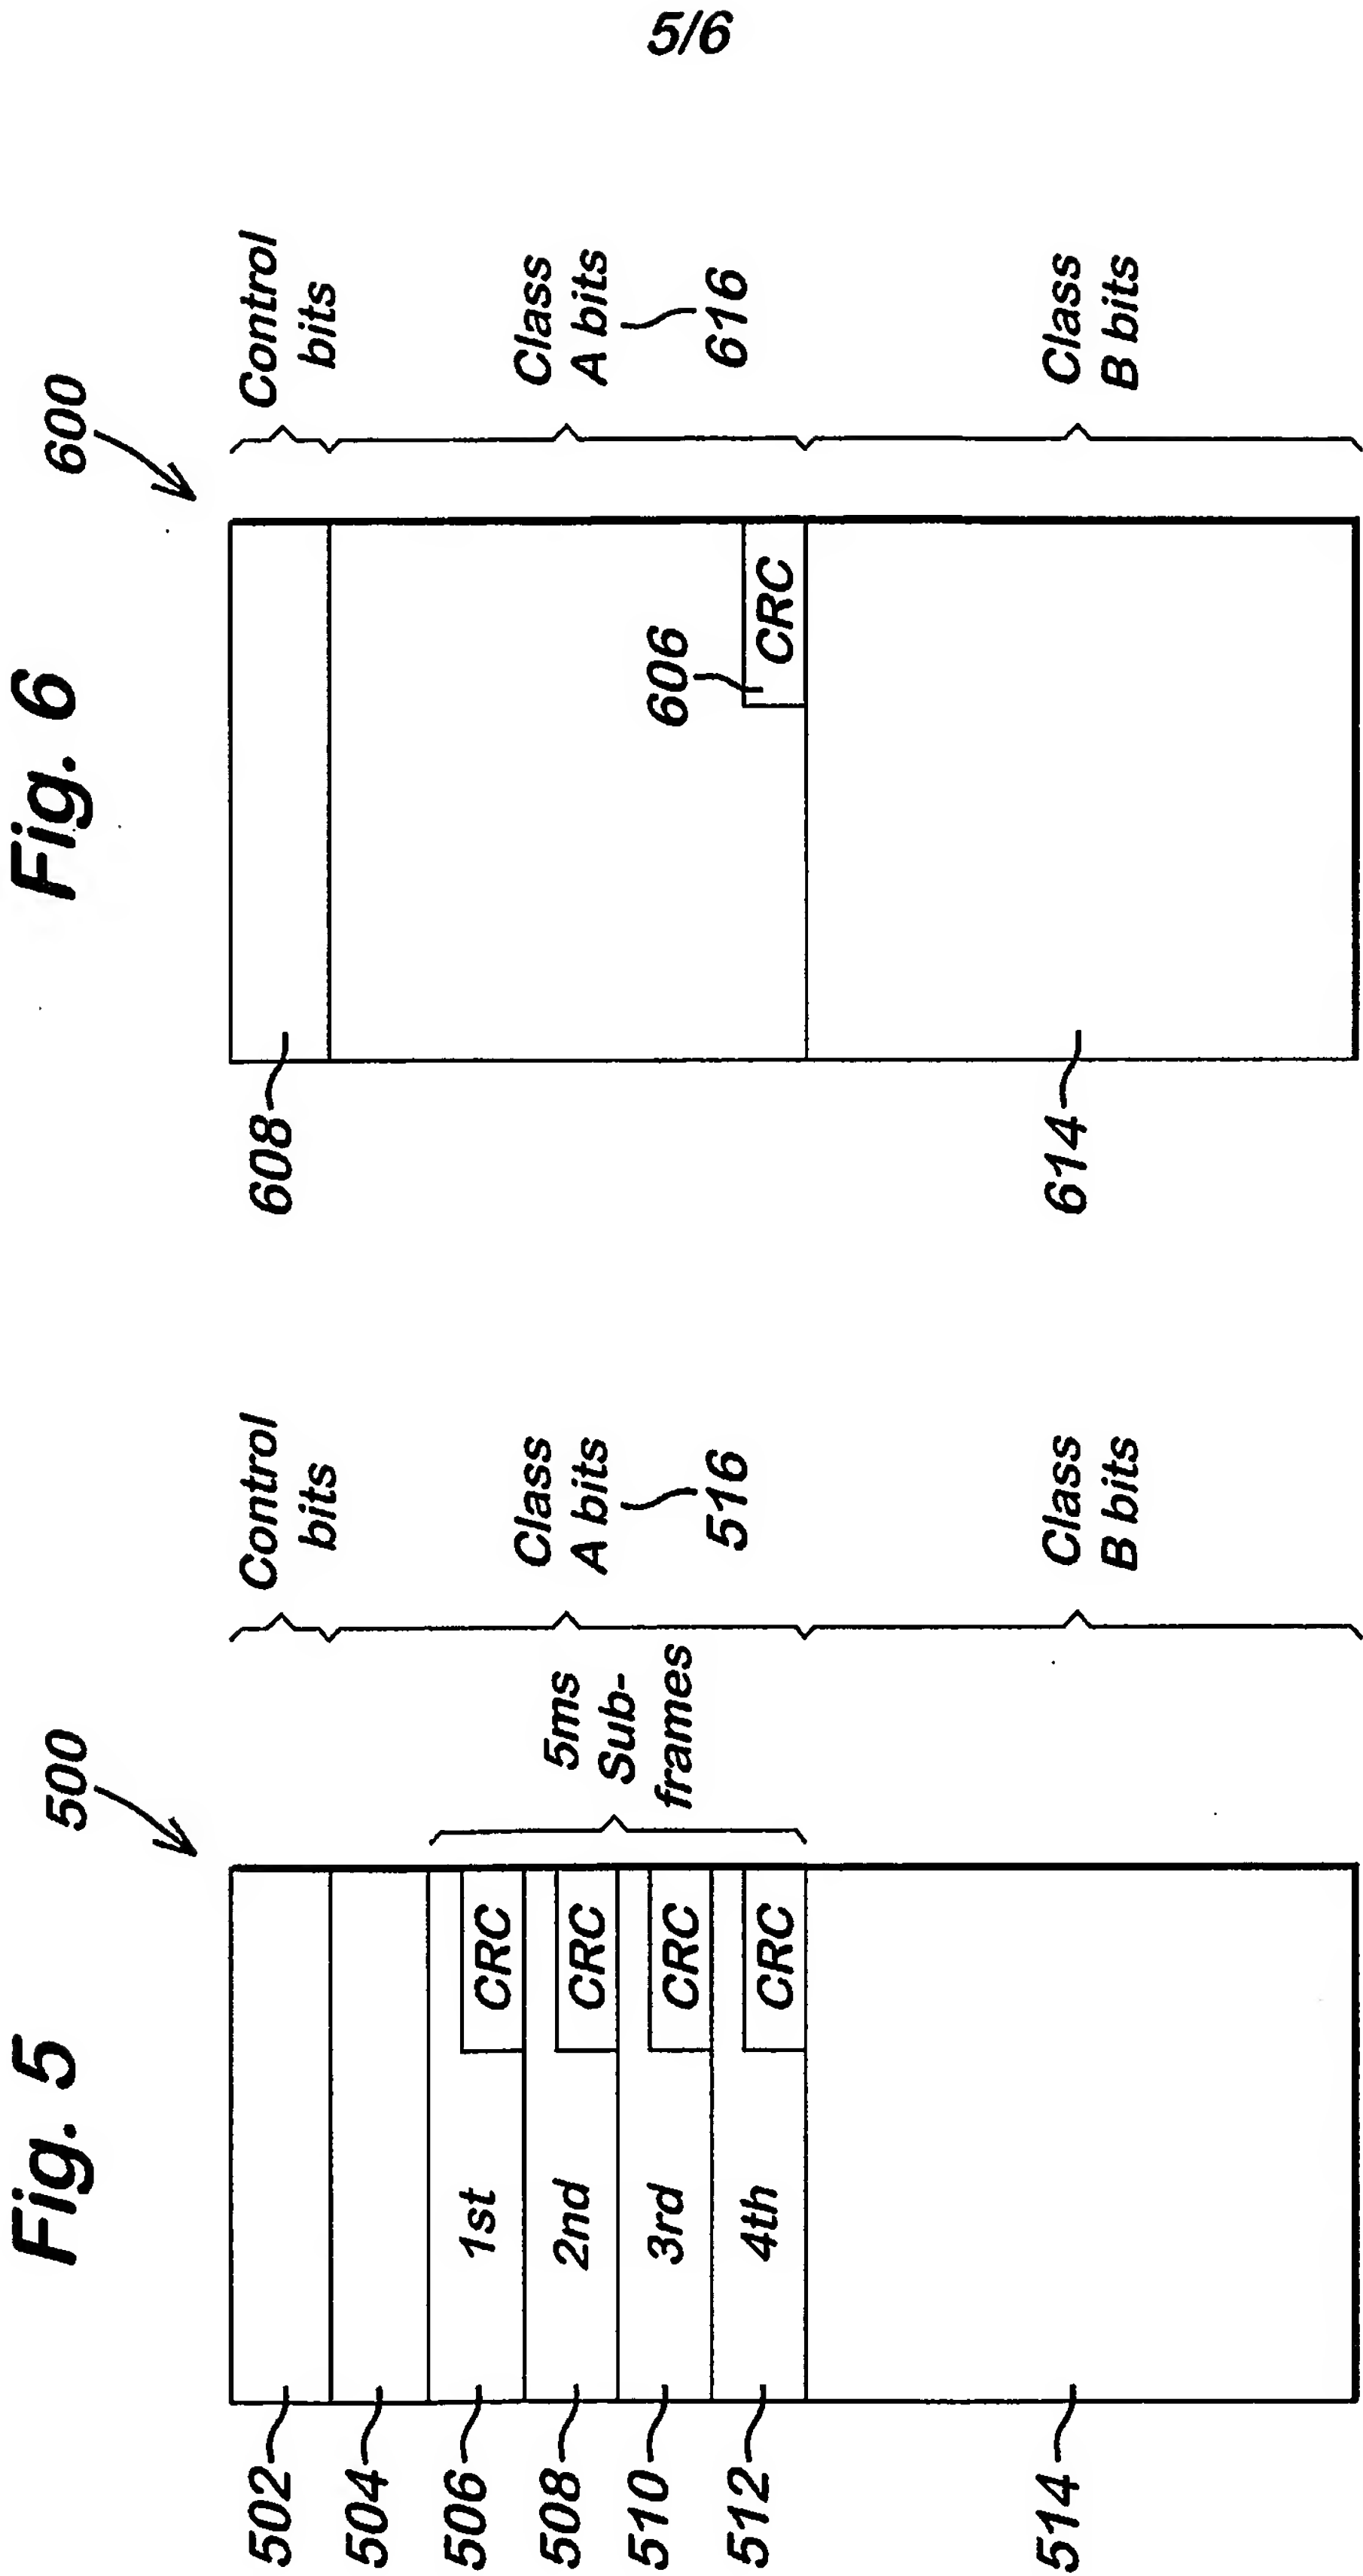


Fig. 7

702

704

706

708

710

Frame_Classification	RIF	CMI/CMR	No_Speech_Classification	TFCI
speech	0	codec mode A	n/a	0001
speech	0	codec mode B	n/a	0010
speech	0	codec mode C	n/a	0011
speech	0	codec mode D	n/a	0100
speech	0	codec mode E	n/a	0101
speech	0	codec mode F	n/a	0110
speech	0	codec mode G	n/a	0111
speech	0	codec mode H	n/a	1000
speech	1	X	n/a	TFCI of previous frame
no speech	X	X	SID first	1001
no speech	X	X	SID update or SID bad	1010
no speech	X	X	no data	n/a

Note 1: X denotes 'don't care'

Note2: RIF=1 indicates that the CMI/CMR corresponds to a codec mode request, and that the codec mode indicator shall take on the same value as the previous frame

Note 3: 'no data' indicates that nothing shall be transmitted during the current frame

1  
INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 2003/005531

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/30

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q, H04B, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6308063 B1 (TOMMI KOISTINEN ET AL), 23 October 2001 (23.10.2001), column 5, line 31 - column 6, line 61, figures 2-5 --	1-37
A	ETSI EN 300 737, volume 7, no. 1 2000-01, Digital cellular telecommunications system, In-band control of remote transcoders and rate adaptors for Enhanced Full Rate (EFR) and full rate traffic channels (GSM 08.60 version 7.0.1 Release 1998), paragraph 4 --	1-37
A	US 6067289 A (JOERG-MARTIN MUELLER ET AL), 23 May 2000 (23.05.2000), column 1, line 25 - line 58; column 2, line 8 - column 3, line 45 --	1-37

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

10 June 2004

Date of mailing of the international search report

14-06-2004

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Fredrik Blomqvist/Els

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 2003/005531

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6356750 B1 (TAPIO HEIKKILÄ), 12 March 2002 (12.03.2002), column 1, line 38 - line 67  --	1-37
A	US 6108560 A (WILLIAM NAVARO ET AL), 22 August 2000 (22.08.2000), abstract  --	1-37
A	A proposal for seamless handovers in GSM indoor wireless networks", Di Claudio, V. et al, This paper appears in: Vehicular Technology Conference, 2001, VTC 2001 Spring. IEE VTS 53rd, Meeting Date: 05/6/2001 - 05/09/2001 Publication Date: 6-9 May 2001, Location: Rhodes Greece, pages 2544-2548, vol. 4, paragraph 3  -- -----	1-37

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

30/04/2004

International application No.

PCT/IB 2003/005531

US	6308063	B1	23/10/2001	AU	9543398	A	10/05/1999
				CA	2305173	A	29/04/1999
				CN	1127870	B	12/11/2003
				CN	1276134	T	06/12/2000
				EP	1025729	A	09/08/2000
				FI	973975	A	17/04/1999
				JP	2001521352	T	06/11/2001
				WO	9921383	A	29/04/1999

US	6067289	A	23/05/2000	AU	706669	B	17/06/1999
				AU	5495496	A	21/11/1996
				DE	19516078	A	07/11/1996
				DE	59609453	D	00/00/0000
				EP	0824833	A,B	25/02/1998
				SE	0824833	T3	
				ES	2180759	T	16/02/2003
				HU	217142	B	29/11/1999
				HU	9800701	A	28/07/1998
				WO	9635299	A	07/11/1996

US	6356750	B1	12/03/2002	AU	745433	B	21/03/2002
				AU	8443998	A	16/02/1999
				CN	1234950	T	10/11/1999
				EP	0927499	A	07/07/1999
				FI	105372	B	00/00/0000
				FI	973090	A	23/01/1999
				JP	2001506470	T	15/05/2001
				NO	991353	A	19/03/1999
				WO	9905871	A	04/02/1999

US	6108560	A	22/08/2000	NONE
----	---------	---	------------	------

# PATENT COOPERATION TREATY

# PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>304766W0/DJW/nlb</b>	<div style="display: flex; justify-content: space-between;"> <div>FOR FURTHER ACTION</div> <div>see Form PCT/ISA/220 as well as, where applicable, item 5 below.</div> </div>	
International application No. <b>PCT/IB 2003/005531</b>	International filing date ( <i>day/month/year</i> ) <b>14 November 2003</b>	(Earliest) Priority Date ( <i>day/month/year</i> )
Applicant <b>Nokia Corporation et al</b>		

This international search report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This international search report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

**1. Basis of the report**

a. With regard to the language, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ The international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. ☐ With regard to any nucleotide and/or amino acid sequence disclosed in the international application, see Box No. I.

2. ☐ Certain claims were found unsearchable (see Box No. II)

3. ☐ Unity of invention is lacking (see Box No. III)

4. With regard to the title,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the abstract,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box No. IV. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. With regard to the drawings,

a. the figure of the drawings to be published with the abstract is Figure No. 6

☒ as suggested by the applicant.

☐ as selected by this Authority, because the applicant failed to suggest a figure.

☐ as selected by this Authority, because this figure better characterizes the invention.

b. ☐ none of the figures is to be published with the abstract.

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 2003/005531

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/30

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q, H04B, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6308063 B1 (TOMMI KOISTINEN ET AL), 23 October 2001 (23.10.2001), column 5, line 31 - column 6, line 61, figures 2-5 --	1-37
A	ETSI EN 300 737, volume 7, no. 1 2000-01, Digital cellular telecommunications system, In-band control of remote transcoders and rate adaptors for Enhanced Full Rate (EFR) and full rate traffic channels (GSM 08.60 version 7.0.1 Release 1998), paragraph 4 --	1-37
A	US 6067289 A (JOERG-MARTIN MUELLER ET AL), 23 May 2000 (23.05.2000), column 1, line 25 - line 58; column 2, line 8 - column 3, line 45 --	1-37



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

10 June 2004

Date of mailing of the international search report

14-06-2004

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Fredrik Blomqvist/Els

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 2003/005531

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6356750 B1 (TAPIO HEIKKILÄ), 12 March 2002 (12.03.2002), column 1, line 38 - line 67  --	1-37
A	US 6108560 A (WILLIAM NAVARO ET AL), 22 August 2000 (22.08.2000), abstract  --	1-37
A	A proposal for seamless handovers in GSM indoor wireless networks", Di Claudio, V. et al, This paper appears in: Vehicular Technology Conference, 2001, VTC 2001 Spring. IEE VTS 53rd, Meeting Date: 05/6/2001 - 05/09/2001 Publication Date: 6-9 May 2001, Location: Rhodes Greece, pages 2544-2548, vol. 4, paragraph 3  -- -----	1-37

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

30/04/2004

International application No.

PCT/IB 2003/005531

US	6308063	B1	23/10/2001	AU	9543398	A	10/05/1999
				CA	2305173	A	29/04/1999
				CN	1127870	B	12/11/2003
				CN	1276134	T	06/12/2000
				EP	1025729	A	09/08/2000
				FI	973975	A	17/04/1999
				JP	2001521352	T	06/11/2001
				WO	9921383	A	29/04/1999
-----							
US	6067289	A	23/05/2000	AU	706669	B	17/06/1999
				AU	5495496	A	21/11/1996
				DE	19516078	A	07/11/1996
				DE	59609453	D	00/00/0000
				EP	0824833	A,B	25/02/1998
				SE	0824833	T3	
				ES	2180759	T	16/02/2003
				HU	217142	B	29/11/1999
				HU	9800701	A	28/07/1998
				WO	9635299	A	07/11/1996
-----							
US	6356750	B1	12/03/2002	AU	745433	B	21/03/2002
				AU	8443998	A	16/02/1999
				CN	1234950	T	10/11/1999
				EP	0927499	A	07/07/1999
				FI	105372	B	00/00/0000
				FI	973090	A	23/01/1999
				JP	2001506470	T	15/05/2001
				NO	991353	A	19/03/1999
				WO	9905871	A	04/02/1999
-----							
US	6108560	A	22/08/2000	NONE			
-----							

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**